

# **Release Note**

Edgecore ECW100 Release v3.45.0000

Document # Edgecore\_ECW100\_v3.45.0000\_1.7-1.9725

Enhancement from v3.43.01\_1.5-1.9535

# **Table of Contents**

1	Fe	ature Enhancement	3
		Port Configuration	
		LLDP	
		Schedule Reboot Weekly	
		Support more than 8 Service Zones	
		Change the behavior of APs when APs' tunnel are disconnected from EWS	
2 Issue Fixed			
	2.1	Brazil Daylight Saving Time	5
		ompatible Version for AP Management	


#### 1 Feature Enhancement

## **1.1** Port Configuration



Add Port Configuration page in System for configuring the VLAN ID to specific port.

#### **1.2** LLDP

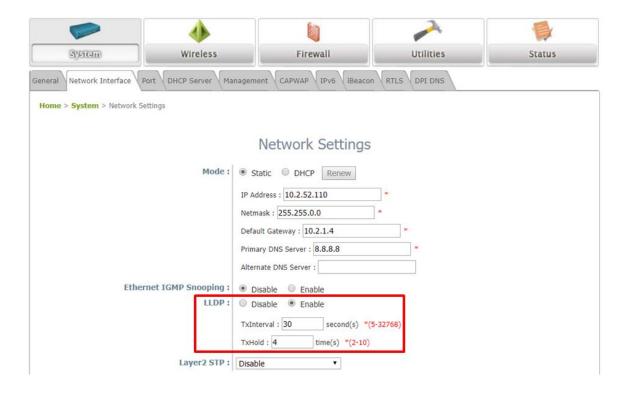

Add LLDP in Network Interface page of System.

**TxInterval:** Setting the interval for sending the packets.

**TxHold:** Setting the times of interval for sending the packets.

### **1.3** Schedule Reboot Weekly

#### **URL:**

http://<AP\_IP>/setScheduleReboot.egi?enable={0 or 1}&time={hh:mm}&week={0~6 or \*}

#### **Example:**

http://192.168.1.1/setScheduleReboot.egi?enable=1&time=16:56&week=0

**enable:** 0 = disable, 1 = enable **time:** Set the time for rebooting.

week: 0 = Sunday, 1 = Monday, 2 = Tuesday, 3 = Wednesday, 4 = Thursday, 5 = Friday, 6 =

Saturday, \* = Everyday

## 1.4 Support more than 8 Service Zones

In this version, AP support more than 8 service zones.

## 1.5 Change the behavior of APs when APs' tunnel are disconnected from EWS

When APs are construct split tunnels with EWS, there are two conditions as below:

- 1. Split tunnel is connected
  - User has been authenticated: User can connect to the Internet
  - User has not been authenticated: User needs to be redirected to EWS for authentication, and the user can connect to the Internet
- 2. Split tunnel is disconnected
  - User has been authenticated: User can connect to the Internet
  - User has not been authenticated: User can not connect to the Internet

# 2 Issue Fixed

# 2.1 Brazil Daylight Saving Time

Fix daylight saving time in Brazil.

# 3 Compatible Version for AP Management

Compatible with EWS series v3.45.0000 and above.